


# AZ764F

## 20 AMP HIGH TEMPERATURE POWER RELAY

### FEATURES

- Quick connect Faston and PCB terminals
- 20 Amp switching capability - 18 Amps over Faston terminals
- Ambient temperature up to 105°C (221°F)
- 5 kV dielectric strength, Isolation spacing  $\geq 10$  mm
- Proof tracking index (PTI/CTI) 250
- Compact size, low seated height of 15.7 mm
- UL / CUR file E43203
- VDE certificate 40012572

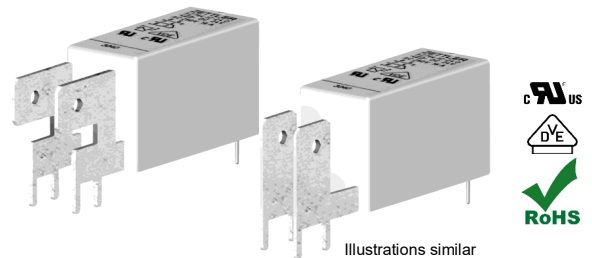

### CONTACTS

<b>Arrangement</b>	SPST-N.O. (1 Form A)
<b>Ratings (max.)</b> switched power switched current switched voltage	(resistive load) 600 W or 5000 VA 20 A 300 VDC* or 400 VAC  * Note: If switching voltage is greater than 30 VDC, special precautions must be taken. Please contact the factory.
<b>Rated Loads</b> <b>UL, CUR</b>	20 A at 250 VAC, general use
<b>VDE</b>	20 A at 250 VAC, resistive, 10k cycles, 85°C 16 A at 250 VAC, resistive, 10k cycles, 105°C 10 A at 250 VAC, resistive, 150k cycles, 105°C
<b>Contact material</b>	AgSnO <sub>2</sub> (silver tin oxide)
<b>Initial resistance</b>	$\leq 100$ m $\Omega$

### COIL

<b>Nominal coil DC voltages</b>	see coil voltage specifications table
<b>Dropout voltage</b>	$\geq 10\%$ of nominal coil voltage
<b>Coil power</b> nominal at pickup voltage max. cont. dissipation	250 mW 140 mW 2.2 W at 23°C (73°F)
<b>Temperature Rise</b>	16 K (29°F) at nominal coil voltage
<b>Max. temperature</b>	Class F insulation - 155°C (311°F)

### COIL VOLTAGE SPECIFICATIONS

Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Resistance Ohm $\pm 10\%$
5	3.75	15.0	102
6	4.5	18.0	144
9	6.75	27.0	330
10	7.5	30.0	400
12	9.0	36.0	580
24	18.0	72.0	2300

### GENERAL DATA

<b>Life Expectancy</b> mechanical electrical	(minimum operations) $3 \times 10^7$ see UL/CUR/VDE ratings
<b>Operate Time</b>	7 ms (typ.) at nominal coil voltage
<b>Release Time</b>	3 ms (typ.) at nominal coil voltage, without coil suppression
<b>Dielectric Strength</b>	(at sea level for 1 min.) 5000 V <sub>RMS</sub> coil to contact 1000 V <sub>RMS</sub> between open contacts
<b>Insulation Resistance</b>	$10^5$ M $\Omega$ (min.) at 20°C, 500 VDC, 50% RH
<b>Isolation spacing</b> clearance creepage	(coil to contact) $\geq 10$ mm $\geq 10$ mm
<b>Insulation</b>	C250 Overvoltage category: III Pollution degree: 3 Nominal voltage: 250 VAC (according to DIN VDE 0110, IEC 60664-1)
<b>Temperature Range</b> operating	(at nominal coil voltage) -40°C (-40°F) to 105°C (221°F)
<b>Vibration resistance</b>	20 g at 30–500 Hz
<b>Shock resistance</b>	30 g
<b>Enclosure</b> type material group flammability	P.B.T. polyester RT II, flux proof IIIa UL94 V-0
<b>Terminals</b>	Tinned copper alloy, P. C. and QC terminals
<b>Soldering</b> max. temperature max. time	270 °C (518°F) 5 seconds
<b>Cleaning</b> max. solvent temp. max. immersion time	80°C (176°F) 30 seconds
<b>Dimensions</b> length - horizontal type length - vertical type width height	44.5 mm (1.752") 40.5 mm (1.594") 12.7 mm (0.500") 15.7 mm (0.618")
<b>Weight</b>	16 grams (approx.)
<b>Packing unit in pcs</b>	12 per carton tube / 600 per carton box
<b>Compliance</b>	UL 508, IEC 61810-1, RoHS, REACH

# AZ764F

## ORDERING DATA

AZ764F  -1AE-   DS

**Nominal coil voltage**  
see coil voltage specifications table


**Terminal shape**  
H: horizontal type - horizontal quick connect terminals  
V: vertical type - vertical quick connect terminals

### Example ordering data

AZ764FH-1AE-12DS Horizontal type, 12 VDC nominal coil voltage


AZ764FV-1AE-9DS Vertical type, 9 VDC nominal coil voltage

## DC COIL OPERATING RANGE

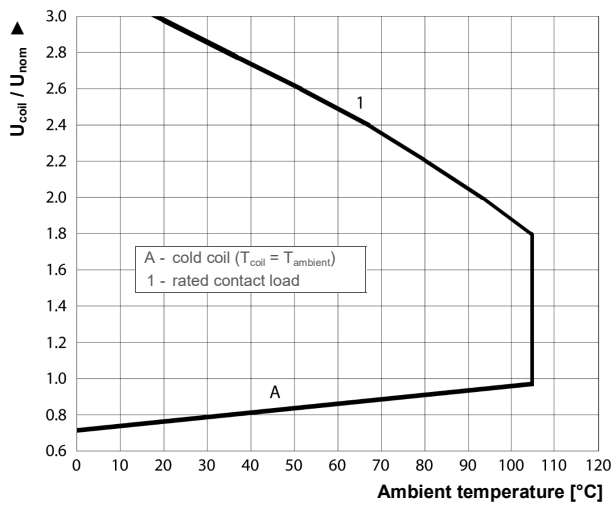


## INDUCTIVE LOADS LIFE REDUCTION

Electrical life reduction factor at inductive AC load

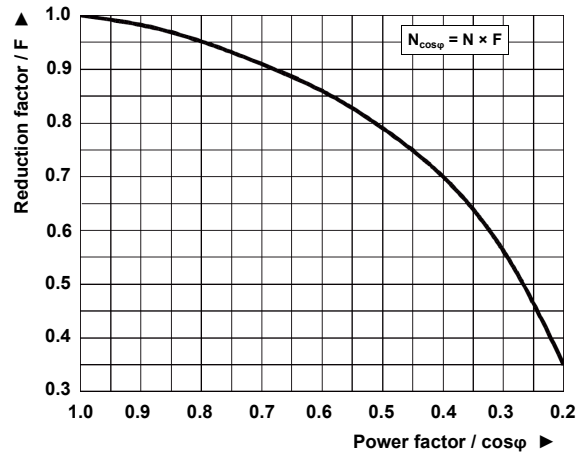


## MAX DC RESISTIVE LOAD BREAKING CAPACITY

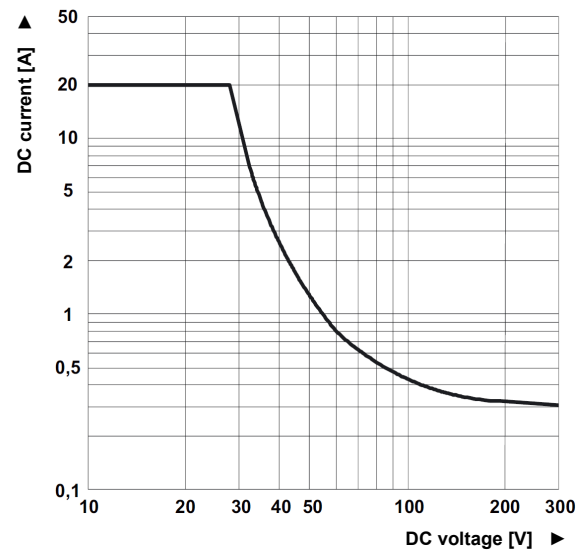

## LIFE EXPECTANCY



Electrical life at 250VAC, resistive load

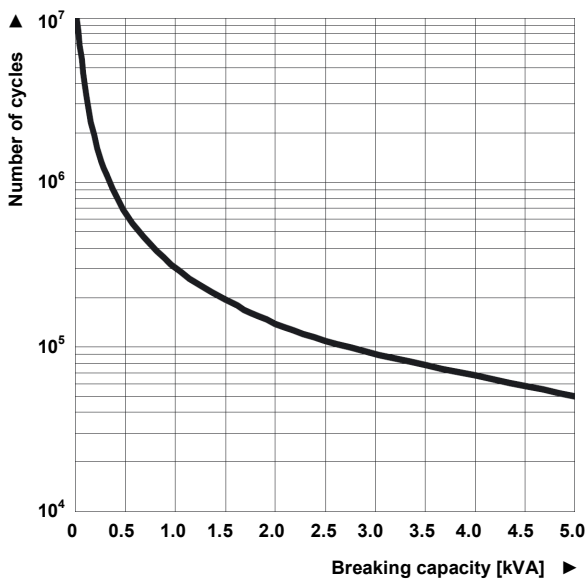

# AZ764F



## MECHANICAL DATA - HORIZONTAL TYPE

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm .010$ "

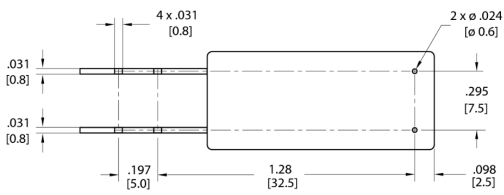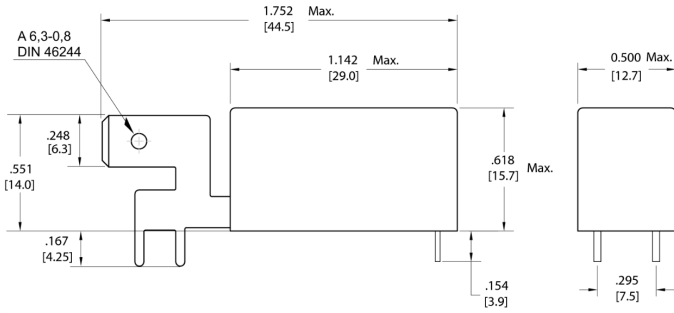


## MECHANICAL DATA - VERTICAL TYPE

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm .010$ "

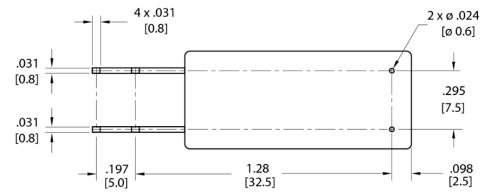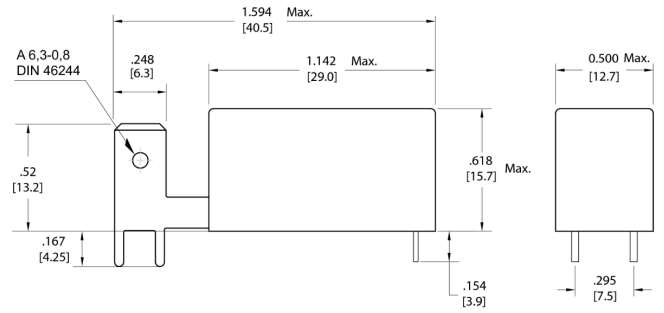


## PC BOARD LAYOUT - HORIZONTAL TYPE

Recommendation for PC board layout. Dimensions in inches with metric equivalents in parentheses. Viewed towards terminals.

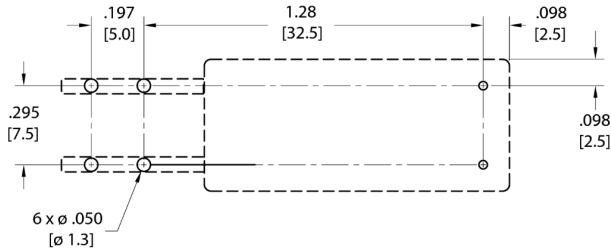


## PC BOARD LAYOUT - VERTICAL TYPE

Recommendation for PC board layout. Dimensions in inches with metric equivalents in parentheses. Viewed towards terminals.

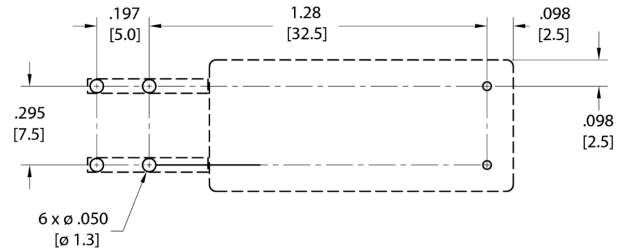

## WIRING DIAGRAMS

Viewed towards terminals.

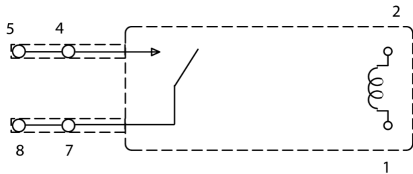

## NOTES

1. Specifications subject to change without notice.
2. All values at 23°C (73°F) unless otherwise stated.
3. Relay may pull in with less than "Must Operate" value.
4. Coil suppression circuits such as diodes, etc. in parallel to the coil will lengthen the release time.
5. Allow suitable slack on leads when wiring.
6. Do not subject the terminals to excessive force.

# AZ764F

## DISCLAIMER

This product specification is to be used in conjunction with the application notes which can be downloaded from the regional ZETTLER relay websites. The specification provides an overview of the most significant part features. Any individual applications and operating conditions are not taken into consideration. It is recommended to test the product under application conditions. Responsibility for the application remains with the customer. Proper operation and service life cannot be guaranteed if the part is operated outside the specified limits.

## ZETTLER GROUP

Building on a foundation of more than a century of expertise in German precision engineering, ZETTLER Group is a world-class enterprise, engaged in the design, manufacturing, sales and distribution of electronic components. Our industry leadership is based on a unique combination of engineering competence and global scale.

For more information on other ZETTLER Group companies, please visit [ZETTLER-group.com](https://www.zettler-group.com). For support on this product or other ZETTLER relays, please visit one of the group sites below.

## SITES FOR ZETTLER RELAYS

### NORTH AMERICA

American Zettler, Inc.  
[www.azettler.com](https://www.azettler.com)  
[sales@azettler.com](mailto:sales@azettler.com)

### EUROPE

Zettler Electronics, GmbH  
[www.zettlerelectronics.com](https://www.zettlerelectronics.com)  
[office@zettlerelectronics.com](mailto:office@zettlerelectronics.com)

Zettler Electronics, Poland  
[www.zettlerelectronics.pl](https://www.zettlerelectronics.pl)  
[office@zettlerelectronics.pl](mailto:office@zettlerelectronics.pl)

### CHINA

Zettler Group, China  
[www.zettlercn.com](https://www.zettlercn.com)  
[relay@zettlercn.com](mailto:relay@zettlercn.com)

### ASIA PACIFIC

Zettler Electronics (HK) Ltd.  
[www.zettlerhk.com](https://www.zettlerhk.com)  
[sales@zettlerhk.com](mailto:sales@zettlerhk.com)



**ZETTLER**