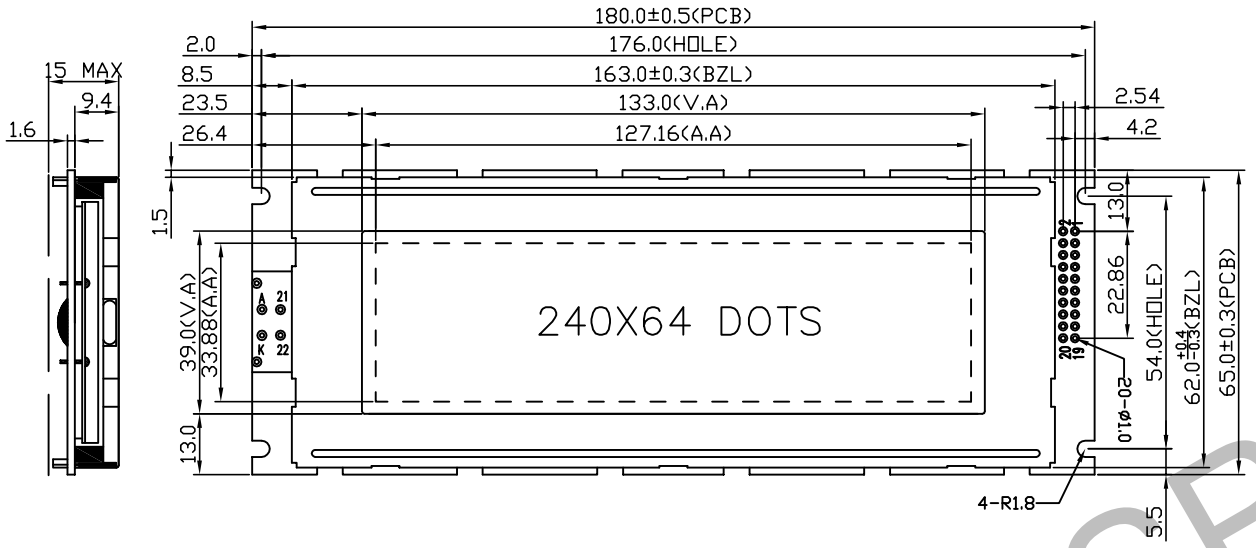

PIN NO.	SYMBOL
22	BL-
21	BL+
20	EBL
19	FS
18	DB7
17	DB6
16	DB5
15	DB4
14	DB3
13	DB2
12	DB1
11	DB0
10	/RES
9	VLCD
8	C/D
7	/CE
6	/RD
5	/WR
4	VADJ
3	VDD
2	VSS
1	FGND



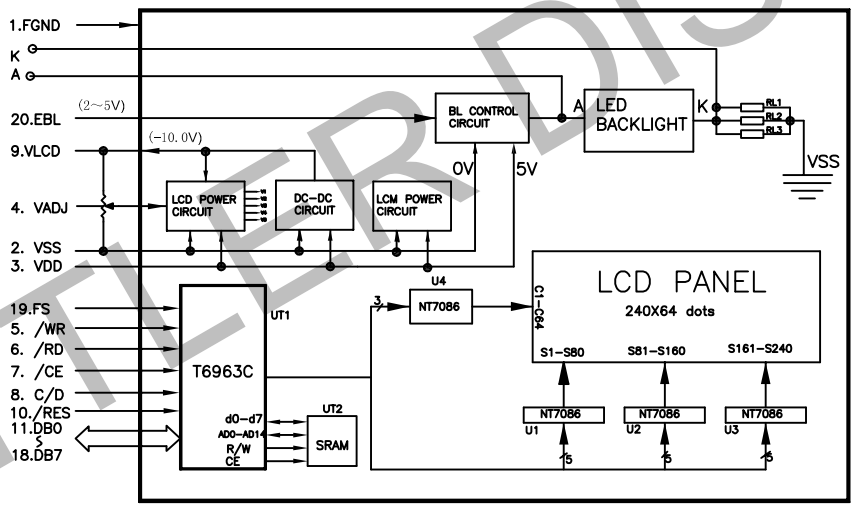

ITEM	SELECTABLE CONTENTS
DISPLAY MODE	STN YELLOW MODE
	STN GRAY MODE
	STN BLUE MODE
	FSTN
POLARIZER TYPE	REFLECTIVE
	TRANSFLECTIVE
	TRANSMISSIVE,POSITIVE
	TRANSMISSIVE,NEGATIVE
VIEWING DIRECTION	6 O'CLOCK
	12 O'CLOCK
LED BACKLIGHT	WHITE
	YELLOW-GREEN
	RED
	GREEN
	BLUE
	AMBER
	–
TEMPERATURE RANGE	STANDARD TEMPERATURE
	WIDE TEMPERATURE
CHARACTER PATTERNS	
OPERATING VOLTAGE	5.0V
LCD DRIVING VOLTAGE	12.0V
LCD DRIVE METHOD	1/64DUTY 1/9 BIAS
LCD DRIVE IC	T6963C/RA6963

THE PART NUMBER IN MASS PRODUCTION

1.STN(Y-G),TRANSFLECTIVE LCD;Y-G BACKLIGHT;6 O'CLOCK;

2.--

3.–

4.--

UNIT MM

3RD ANGLE

TOLERANCE
X.X = ±0.3
X.XX = ±0.20
ANG = –

SCALE: 1:1

DRAWN:

CHECKED:

APPROVED:

ZETTLER DISPLAYS

XIAMEN ZETTLER ELECTRONICS CO., LTD.

TITLE: LCM

MODEL NO: AGM2464B SERIES

REV A

PART NO:

SH NO 1/1

ZETTLER DISPLAYS